

A. Termination Details


TERMINATION :

INPUT : Thermocouple ,
 4 + T/C
 5 - T/C

OUTPUT : 4-20mA DC
 1 + I
 2 - I

SUPPLY : 24V DC
 7 + V
 8 - V

Unconnected terminals / Floating.
 3 and 6

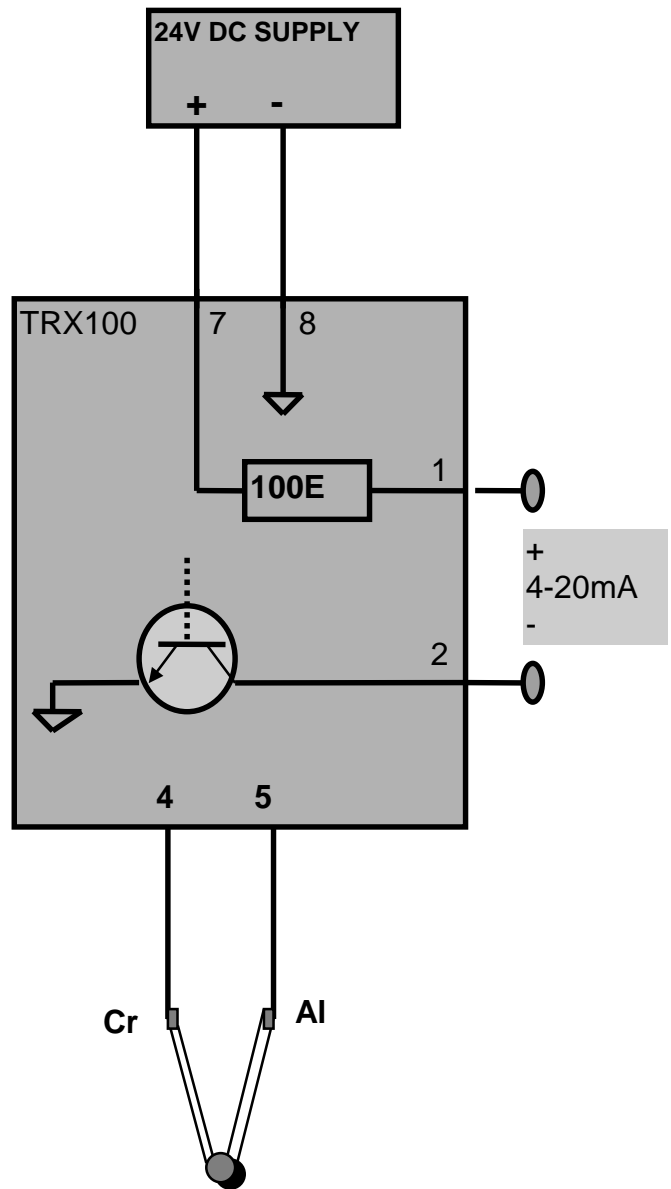

Environmental Limitations : **Delicate Precision Instrument**
 Maximum 50 Deg C, 70% RH Non-Cond, Acid-Alkali-Salt Free area.
 the equipment will fail if environment is Hot / Corrosive / Vibrating.

Cleaning and Maintenance :
 No Maintenance required, Clean front panel with moist sponge & Colin/Brisk.

Power Supply : 230V AC 50Hz +/- 10%, Sinewave UPS & DG Sets.

